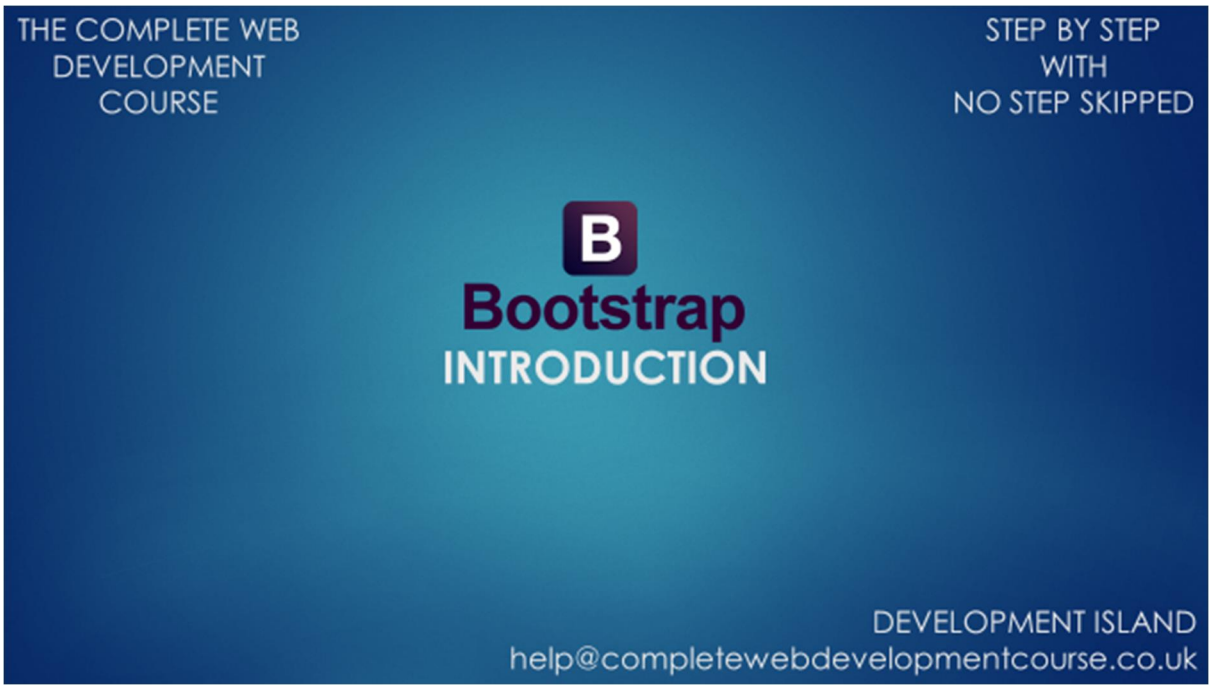


```
<!DOCTYPE html>
<html lang="en">
  <head>
    <meta charset="utf-8">
    <meta http-equiv="X-UA-Compatible" content="IE=edge">
    <meta name="viewport" content="width=device-width,
initial-scale=1">
    <!-- The above 3 meta tags *must* come first in the
head; any other head content must come *after* these tags
-->
    <title>
      Introduction
    </title>

    <!-- Bootstrap -->
    <link href="css/bootstrap.min.css" rel="stylesheet">

    <!-- HTML5 shim and Respond.js for IE8 support of
HTML5 elements and media queries -->
    <!-- WARNING: Respond.js doesn't work if you view the
page via file:// -->
    <!--[if lt IE 9]>
<script
src="https://oss.maxcdn.com/html5shiv/3.7.2/html5shiv.min.
js">
</script>
```

```
<script
src="https://oss.maxcdn.com/respond/1.4.2/respond.min.js">
</script>
<![endif]-->
  </head>
  <body>
    <div class="container-fluid">
      <h1>
        We are learning Bootstrap
      </h1>
      <p>
        Hello World!
      </p>
    </div>

    <!-- jQuery (necessary for Bootstrap's JavaScript
plugins) -->
    <script
src="https://ajax.googleapis.com/ajax/libs/jquery/1.11.2/j
query.min.js">
    </script>
    <!-- Include all compiled plugins (below), or include
individual files as needed -->
    <script src="js/bootstrap.min.js">
    </script>
  </body>
</html>
```

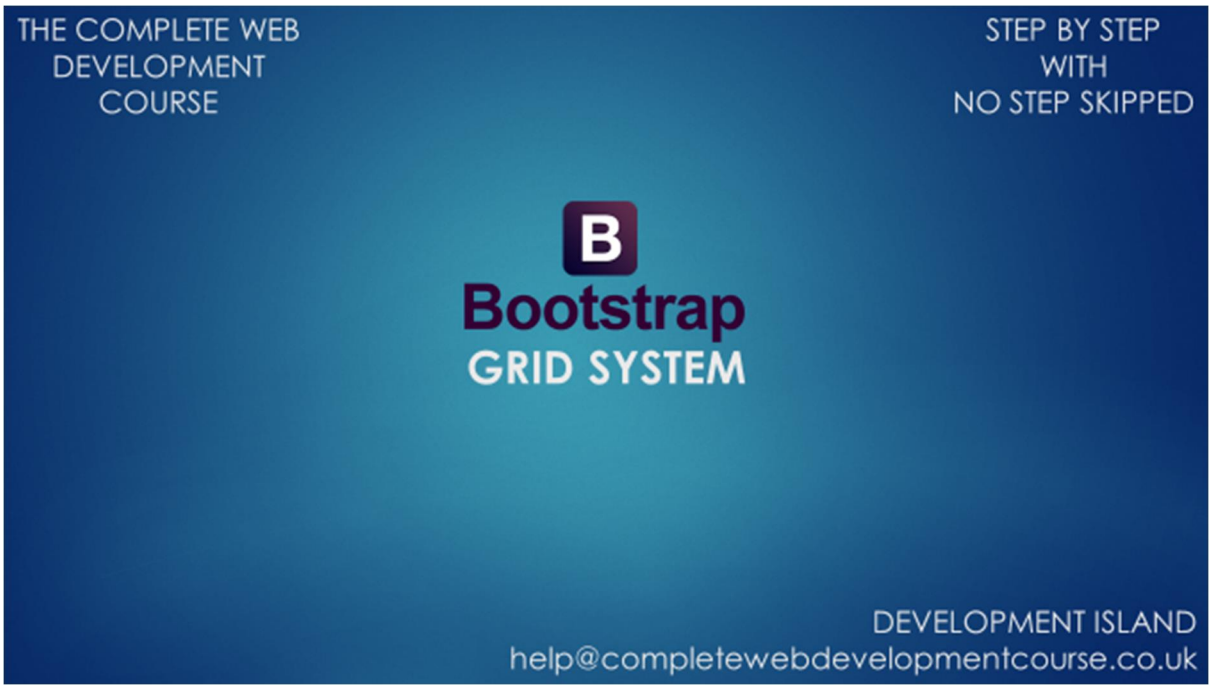


```
<!DOCTYPE html>
<html lang="en">
  <head>
    <meta charset="utf-8">
    <meta http-equiv="X-UA-Compatible" content="IE=edge">
    <meta name="viewport" content="width=device-width,
initial-scale=1">
    <title>
      Grid System
    </title>
    <link href="css/bootstrap.min.css" rel="stylesheet">
    <style>
      #deviceSize{
        margin-bottom: 30px;

      }
      .bluebox{
        background-color: #2fc5b8;
        height: 200px;
      }
      .greenbox{
        background-color: #8deb46;
        height: 200px;
      }

    </style>
```

```
  </head>
  <body>
    <div class="container-fluid">
      <div id="deviceSize">
        Device Size:
      </div>
      <div class="bluebox col-md-8 col-sm-6 col-xs-3 col-
lg-4">
        col-md-8 col-sm-6 col-xs-3 col-lg-4
      </div>
      <div class="greenbox col-md-4 col-sm-6 col-xs-9 col-
lg-8">
        col-md-4 col-sm-6 col-xs-9 col-lg-8
      </div>
    </div>
    <script
src="https://ajax.googleapis.com/ajax/libs/jquery/1.11.2/j
query.min.js">
    </script>
    <script src="js/bootstrap.min.js">
    </script>
    <script>
      $(function(){
        $( window ).resize(function() {
          var windowWidth = $(window).width();
          if(windowWidth<768){
            $('#deviceSize').text('Device Size: ' +
windowWidth + 'px - Extra small devices (Phones)');

          }
          else if(windowWidth<992){
            $('#deviceSize').text('Device Size: ' +
windowWidth + 'px - Small devices (Tablets)');

          }
          else if(windowWidth<1200){
            $('#deviceSize').text('Device Size: ' +
windowWidth + 'px - Medium devices (Desktops)');

          }
          else{
```

```
            $('#deviceSize').text('Device Size: ' +
windowWidth + 'px - Large devices (Desktops)');

          }
        }
                              );

      }
       );
    </script>
  </body>
</html>
```

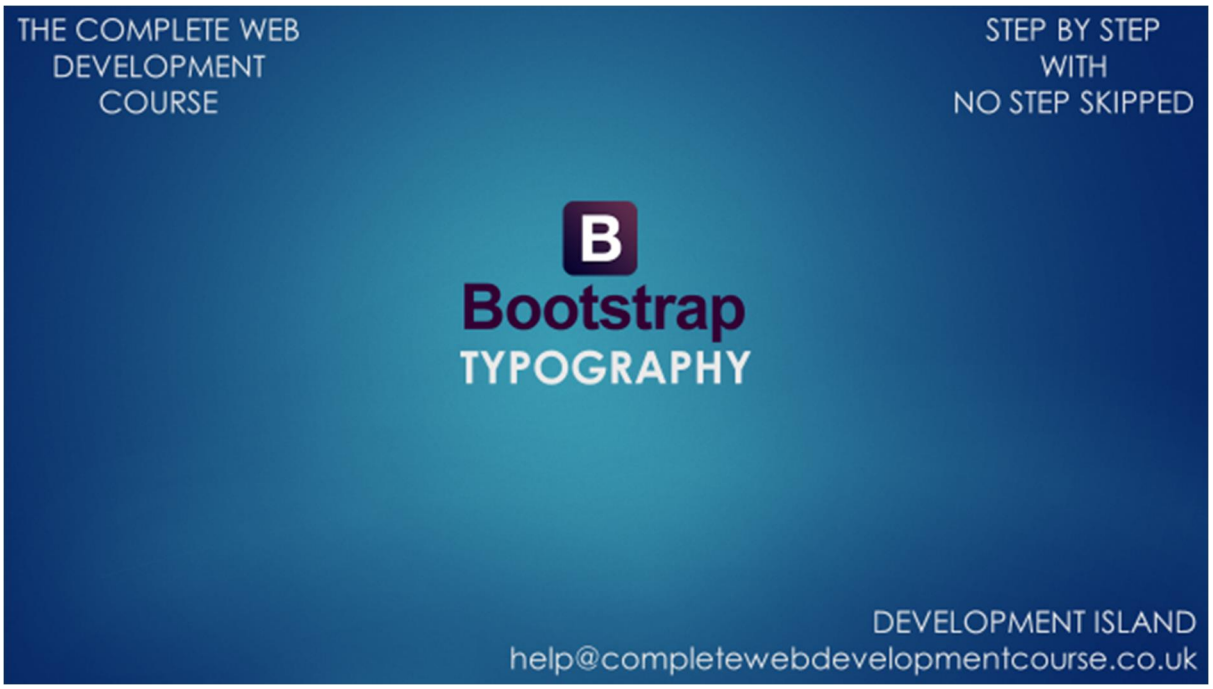


```
<!DOCTYPE html>
<html lang="en">
  <head>
    <meta charset="utf-8">
    <meta http-equiv="X-UA-Compatible" content="IE=edge">
    <meta name="viewport" content="width=device-width,
initial-scale=1">
    <title>
      Typography
    </title>
    <link href="css/bootstrap.min.css" rel="stylesheet">
    <style>

    </style>
  </head>
  <body>
    <div class="container-fluid">
      <h1>
        Bootstrap heading
      </h1>
      <h2>
        Bootstrap heading
      </h2>
      <h3>
        Bootstrap heading
      </h3>
```

```
    <h4>
      Bootstrap heading
    </h4>
    <h5>
      Bootstrap heading
    </h5>
    <h6>
      Bootstrap heading
    </h6>
    <div class="h5">
      This is some text.
    </div>
    <p>
      Text can be
      <br />
      <mark>
        highlighted
      </mark>
      <br />
      <s>
        struck through
      </s>
      <br />
      <u>
        underlined
      </u>
      <br />
      <span class="small">
        de-emphasised
      </span>
      <br />
      <strong>
        made bold
      </strong>
      <br />
      or
      <em>
        emphasized with italics
      </em>
    </p>

    <p>
```

```
    This is a simple paragraph
  </p>
  <p class="lead">
    This paragraph stands out
  </p>
  <p class="small">
    This paragraph is made small
  </p>
  <p class="text-right">
    Text in this paragraph is right aligned
  </p>
  <p class="text-capitalize">
    Text in this paragraph is capitalized
  </p>
  <p class="text-primary">
    This text is emphasised
  </p>
  <p class="text-success">
    This text is emphasised
  </p>
  <p class="text-danger">
    This text is emphasised
  </p>
  <p class="text-warning">
    This text is emphasised
  </p>
  <p class="text-info">
    This text is emphasised
  </p>
  <ul class="list-unstyled list-inline">
    <li>
      HTML
    </li>

    <li>
      CSS
    </li>

    <li>
      JQuery
    </li>
```

```
      </ul>
      <div class="bg-primary">
        bg-primary
      </div>
      <div class="bg-success">
        bg-success
      </div>
      <div class="bg-danger">
        bg-danger
      </div>
      <div class="bg-warning">
        bg-warning
      </div>
      <div class="bg-info">
        bg-info
      </div>
    </div>
    <script
src="https://ajax.googleapis.com/ajax/libs/jquery/1.11.2/j
query.min.js">
    </script>
    <script src="js/bootstrap.min.js">
    </script>
  </body>
</html>
```

```
<!DOCTYPE html>
<html lang="en">
  <head>
    <meta charset="utf-8">
    <meta http-equiv="X-UA-Compatible" content="IE=edge">
    <meta name="viewport" content="width=device-width,
initial-scale=1">
    <title>
      Tables
    </title>
    <link href="css/bootstrap.min.css" rel="stylesheet">
    <style>

    </style>
  </head>
  <body>
    <div class="container-fluid">
      <table class="table">
        <tr>
          <th>
            Phone Make
          </th>
          <th>
            Model
          </th>
          <th>
```

```
            Storage
          </th>
        </tr>

        <tr>
          <td>
            Apple Apple Apple Apple Apple Apple Apple
Apple Apple Apple Apple Apple
          </td>
          <td>
            Iphone 6
          </td>
          <td>
            32Go
          </td>
        </tr>
        <tr>
          <td>
            Apple
          </td>
          <td>
            Iphone 5
          </td>
          <td>
            32Go
          </td>
        </tr>
        <tr>
          <td>
            Apple
          </td>
          <td>
            Iphone 5s
          </td>
          <td>
            32Go
          </td>
        </tr>
        <tr>
          <td>
            Apple
          </td>
```

```
          <td>
            Iphone 4
          </td>
          <td>
            32Go
          </td>
        </tr>

      </table>

      <div class="table-responsive">
        <table class="table table-striped table-hover
table-condensed table-bordered">
          <tr>
            <th>
              Phone Make
            </th>
            <th>
              Model
            </th>
            <th>
              Storage
            </th>
          </tr>

          <tr>
            <td>
              Apple Apple Apple Apple Apple Apple Apple
Apple Apple Apple Apple Apple Apple Apple Apple Apple
Apple Apple Apple Apple Apple Apple
            </td>
            <td>
              Iphone 6
            </td>
            <td>
              32Go
            </td>
          </tr>
          <tr>
            <td>
              Apple
            </td>
```

```
            <td>
              Iphone 5
            </td>
            <td>
              32Go
            </td>
          </tr>
          <tr>
            <td>
              Apple
            </td>
            <td>
              Iphone 5s
            </td>
            <td>
              32Go
            </td>
          </tr>
          <tr>
            <td>
              Apple
            </td>
            <td>
              Iphone 4
            </td>
            <td>
              32Go
            </td>
          </tr>

        </table>

      </div>
    </div>
    <script
src="https://ajax.googleapis.com/ajax/libs/jquery/1.11.2/j
query.min.js">
    </script>
    <script src="js/bootstrap.min.js">
    </script>
  </body>
</html>
```

THE COMPLETE WEB DEVELOPMENT COURSE

STEP BY STEP WITH NO STEP SKIPPED

Bootstrap

FORMS (1)

APPLICATION: INLINE AND HORIZONTAL RESPONSIVE LOGIN FORMS

DEVELOPMENT ISLAND
help@completewebdevelopmentcourse.co.uk

THE COMPLETE WEB DEVELOPMENT COURSE

STEP BY STEP WITH NO STEP SKIPPED

Bootstrap

FORMS (2)

DEVELOPMENT ISLAND
help@completewebdevelopmentcourse.co.uk

```
<!DOCTYPE html>
<html lang="en">
  <head>
    <meta charset="utf-8">
    <meta http-equiv="X-UA-Compatible" content="IE=edge">
    <meta name="viewport" content="width=device-width,
initial-scale=1">
    <title>
      forms
    </title>
    <link href="css/bootstrap.min.css" rel="stylesheet">
    <style>

    </style>
  </head>
  <body>
    <div class="container-fluid">
      <form class="form-inline">
        <div class="form-group">
          <label for="email">
            Email:
          </label>
          <input type="email" id="email"
placeholder="Email" class="form-control">
        </div>
```

```
        <div class="form-group">
          <label for="password">
            Password:
          </label>

          <input type="password" id="password"
placeholder="Password"  class="form-control">
        </div>

        <button type="submit" class="btn btn-default">
          Login
        </button>
      </form>
      <br />
      <hr>

      <form class="form-horizontal">
        <div class="form-group">
          <label for="email" class="col-sm-2 control-
label">
            Email:
          </label>
          <div class="col-sm-10">
            <input type="email" id="email"
placeholder="Email" class="form-control">

          </div>
        </div>

        <div class="form-group">
          <label for="password" class="col-sm-2 control-
label">
            Password:
          </label>

          <div class="col-sm-10">
            <input type="password" id="password"
placeholder="Password"  class="form-control">

          </div>
        </div>
```

```
        <div class="col-sm-offset-2 col-sm-10">
          <button type="submit" class="btn btn-default">
            Login
          </button>

        </div>
      </form>
      <br />
      <hr>

      <form>
        <label for="comments">
          Comments:
        </label>
        <textarea class="form-control" rows="5"
id="comments">
        </textarea>

        <div class="checkbox checkbox-inline">
          <label>
            <input type="checkbox" value="value1"
id="checkbox1">
            Checkbox1
          </label>

        </div>

        <div class="checkbox checkbox-inline disabled">
          <label>
            <input type="checkbox" value="value2"
id="checkbox2">
            Checkbox2
          </label>

        </div>
        <br />

        <br />
        <hr>

        <div class="radio radio-inline">
          <label>
```

```
            <input type="radio" name="radios" id="radio1"
value="option1">
            Radio Option 1
          </label>

        </div>
        <div class="radio radio-inline">
          <label>
            <input type="radio" name="radios" id="radio2"
value="option2">
            Radio Option 1
          </label>

        </div>
        <div class="radio radio-inline">
          <label>
            <input type="radio" name="radios" id="radio3"
value="option3" disabled>
            Radio Option 1
          </label>

        </div>
        <br />
        <hr>
        <select multiple class="form-control">
          <option>
            Option 1
          </option>

          <option>
            Option 2
          </option>

          <option>
            Option 3
          </option>

        </select>

        <br />
```

```
        <input type="text" class="form-control"
placeholder="Text Input" disabled>

        <br />
        <hr>

        <div class="row">
          <div class="form-group has-success col-xs-2">
            <label for="textInput1" class="sr-only">
              Text Input 1
            </label>

            <input type="text" class="form-control"
id="textInput1" placeholder="Text Input 1">

          </div>
          <div class="form-group has-error col-xs-6">
            <label for="textInput2" class="sr-only">
              Text Input 2
            </label>

            <input type="text" class="form-control input-
lg" id="textInput2" placeholder="Text Input 2">

          </div>
          <div class="form-group has-warning col-xs-4">
            <label for="textInput3" class="sr-only">
              Text Input 3
            </label>

            <input type="text" class="form-control input-
sm" id="textInput3" placeholder="Text Input 3">

          </div>

        </div>

        <br />
        <hr>

        <div class="form-group has-feedback has-warning">
          <label for="textInput4" class="sr-only">
```

```
            Text Input
          </label>

          <input type="text" class="form-control"
id="textInput4" placeholder="Text Input">
          <span class="glyphicon glyphicon-alert form-
control-feedback">
          </span>
          <span class="sr-only">
            warning
          </span>
        </div>
        <br />
        <hr>

        <div class="input-group has-feedback has-success">
          <label for="textInput4" class="sr-only">
            Text Input
          </label>
          <span class="input-group-addon">
            @
          </span>
          <input type="text" class="form-control"
id="textInput4" placeholder="Text Input">
          <span class="glyphicon glyphicon-ok form-
control-feedback">
          </span>
          <span class="sr-only">
            warning
          </span>
        </div>

        <br />
        <hr>

        <div class="input-group has-feedback has-success">
          <label for="textInput4" class="sr-only">
            Text Input
          </label>
          <span class="input-group-btn">
            <button type="button" class="btn btn-default">
              Submit
```

```
            </button>

          </span>
          <input type="text" class="form-control"
id="textInput4" placeholder="Text Input">
          <span class="glyphicon glyphicon-ok form-
control-feedback">
          </span>
          <span class="sr-only">
            warning
          </span>
        </div>
      </form>
    </div>
    <script
src="https://ajax.googleapis.com/ajax/libs/jquery/1.11.2/j
query.min.js">
    </script>
    <script src="js/bootstrap.min.js">
    </script>
  </body>
</html>
```

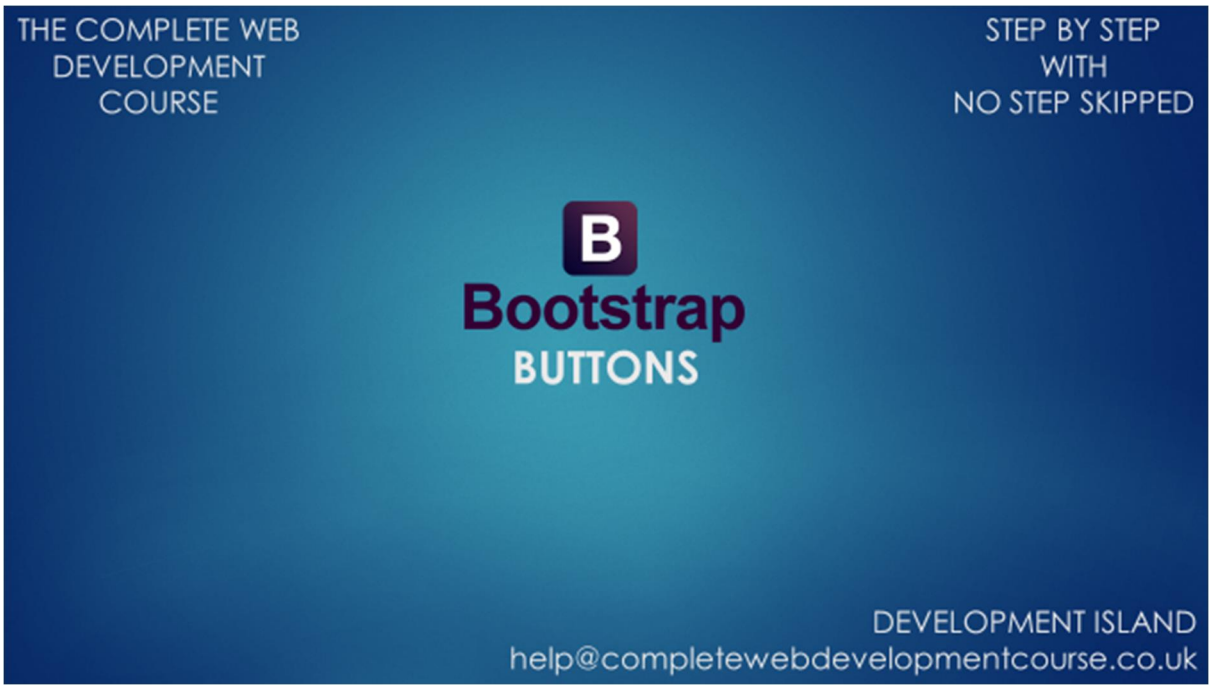


```
<!DOCTYPE html>
<html lang="en">
  <head>
    <meta charset="utf-8">
    <meta http-equiv="X-UA-Compatible" content="IE=edge">
    <meta name="viewport" content="width=device-width,
initial-scale=1">
    <title>
      buttons
    </title>
    <link href="css/bootstrap.min.css" rel="stylesheet">
    <style>

    </style>
  </head>
  <body>
    <div class="container-fluid">
      <a class="btn btn-link" href="#">
        Top of the page
      </a>
      <button class="btn btn-primary btn-lg"
type="submit">
        Reset
      </button>
      <input class="btn btn-info btn-sm active"
type="button" value="Cancel">
```

```
      <input class="btn btn-success btn-xs disabled"
type="button" value="Submit">

      <br />
      <br />
      <br />
      <div class="btn-group btn-group-justified"
role="group">
        <div class="btn-group">
          <button type="button" class="btn btn-default">
            Left
          </button>

        </div>

        <div class="btn-group">
          <button type="button" class="btn btn-default">
            Middle
          </button>

        </div>

        <div class="btn-group">
          <button type="button" class="btn btn-default">
            Right
          </button>

        </div>

      </div>
      <br />
      <br />
      <br />
      <div class="btn-toolbar" role="toolbar">
        <div class="btn-group btn-group-vertical"
role="group">
          <button type="button" class="btn btn-default">
            Left
          </button>

          <button type="button" class="btn btn-default">
            Middle
```

```
          </button>

          <button type="button" class="btn btn-default">
            Right
          </button>

        </div>
        <div class="btn-group" role="group">
          <button type="button" class="btn btn-default">
            Left
          </button>

          <button type="button" class="btn btn-default">
            Middle
          </button>

          <button type="button" class="btn btn-default">
            Right
          </button>

        </div>
        <div class="btn-group" role="group">
          <button type="button" class="btn btn-default">
            Left
          </button>

          <button type="button" class="btn btn-default">
            Middle
          </button>

          <button type="button" class="btn btn-default">
            Right
          </button>

        </div>
      </div>


    </div>
    <script
src="https://ajax.googleapis.com/ajax/libs/jquery/1.11.2/j
query.min.js">
```

```
    </script>
    <script src="js/bootstrap.min.js">
    </script>
  </body>
</html>
```

```
<!DOCTYPE html>
<html lang="en">
  <head>
    <meta charset="utf-8">
    <meta http-equiv="X-UA-Compatible" content="IE=edge">
    <meta name="viewport" content="width=device-width,
initial-scale=1">
    <title>
      buttons
    </title>
    <link href="css/bootstrap.min.css" rel="stylesheet">
    <style>

    </style>
  </head>
  <body>
    <div class="container-fluid">
      <img src="images/picture.jpg" alt="Responsive image"
class="img-responsive img-circle">
    </div>
    <script
src="https://ajax.googleapis.com/ajax/libs/jquery/1.11.2/j
query.min.js">
    </script>
    <script src="js/bootstrap.min.js">
    </script>
```

```
  </body>
</html>
```

```
<!DOCTYPE html>
<html lang="en">
  <head>
    <meta charset="utf-8">
    <meta http-equiv="X-UA-Compatible" content="IE=edge">
    <meta name="viewport" content="width=device-width,
initial-scale=1">
    <title>
      navs
    </title>
    <link href="css/bootstrap.min.css" rel="stylesheet">
    <style>

    </style>
  </head>
  <body>
    <div class="container-fluid">
      <ul class="nav nav-tabs nav-justified">
        <li role="presentation" class="active">
          <a href="#">
            <span class="glyphicon glyphicon-home">
            </span>
            Home
          </a>
        </li>
```

```
      <li role="presentation">
        <a href="#">
          <span class="glyphicon glyphicon-envelope">
          </span>
          Messages
          <span class="badge">
            3
          </span>
        </a>
      </li>

      <li role="presentation">
        <a href="#">
          Notifications
          <span class="badge">
            3
          </span>
        </a>
      </li>

      <li role="presentation">
        <a href="#">
          Contact us
        </a>
      </li>

    </ul>

    <ul class="nav nav-pills nav-stacked">
      <li role="presentation" class="active">
        <a href="#">
          Home
        </a>
      </li>

      <li role="presentation">
        <a href="#">
          Page 1
        </a>
      </li>

      <li role="presentation">
```

```
          <a href="#">
            Page 2
          </a>
        </li>

        <li role="presentation" class="disabled">
          <a href="#">
            Page 3
          </a>
        </li>

      </ul>
    </div>
    <script
src="https://ajax.googleapis.com/ajax/libs/jquery/1.11.2/j
query.min.js">
    </script>
    <script src="js/bootstrap.min.js">
    </script>
  </body>
</html>
```

```
<!DOCTYPE html>
<html lang="en">
  <head>
    <meta charset="utf-8">
    <meta http-equiv="X-UA-Compatible" content="IE=edge">
    <meta name="viewport" content="width=device-width,
initial-scale=1">
    <title>
      navbars
    </title>
    <link href="css/bootstrap.min.css" rel="stylesheet">
    <style>

    </style>
  </head>
  <body>
    <nav role="navigation" class="navbar navbar-inverse
navbar-fixed-top">
      <div class="container-fluid">
        <div class="navbar-header">
          <a class="navbar-brand">
            Store
          </a>
          <button type="button" class="navbar-toggle"
data-target="#navbarCollapse" data-toggle="collapse">
            <span class="sr-only">
```

```
            Toggle navigation
          </span>
          <span class="icon-bar">
          </span>
          <span class="icon-bar">
          </span>
          <span class="icon-bar">
          </span>
        </button>
      </div>
      <div class="navbar-collapse collapse"
id="navbarCollapse">
        <ul class="nav navbar-nav">
          <li class="active">
            <a href="#">
              All Products
            </a>
          </li>
          <li>
            <a href="#">
              Help
            </a>
          </li>
          <li>
            <a href="#">
              Department
              <span class="caret">
              </span>
            </a>
          </li>
        </ul>
        <form class="navbar-form navbar-left"
role="search">
          <div class="input-group">
            <span class="input-group-btn">
              <button type="submit" class="btn btn-info">
                Go
              </button>
            </span>
            <label for="search" class="sr-only">
              Search
            </label>
```

```
            <input type="text" id="search" class="form-
control" placeholder="Search">
            <span class="glyphicon glyphicon-search form-
control-feedback">
            </span>
          </div>
        </form>

        <form class="navbar-form navbar-right">
          <input class="btn btn-success" type="button"
value="Login">
        </form>
      </div>
  </div>
  </nav>
  <div class="container-fluid" style="margin-top:60px">
    <p>
      Paragraph
    </p>

    <p>
      Paragraph
    </p>

    <p>
      Paragraph
    </p>

    <p>
      Paragraph
    </p>

    <p>
      Paragraph
    </p>

    <p>
      Paragraph
    </p>

    <p>
      Paragraph
```

```
    </p>

    <p>
      Paragraph
    </p>

    <p>
      Paragraph
    </p>

    <p>
      Paragraph
    </p>

    <p>
      Paragraph
    </p>

    <p>
      Paragraph
    </p>

    <p>
      Paragraph
    </p>

    <p>
      Paragraph
    </p>

    <p>
      Paragraph
    </p>

    <p>
      Paragraph
    </p>

    <p>
      Paragraph
    </p>

    <p>
      Paragraph
    </p>
```

```
    <p>
      Paragraph
    </p>

    <p>
      Paragraph
    </p>

    <p>
      Paragraph
    </p>

    <p>
      Paragraph
    </p>

    <p>
      Paragraph
    </p>

    <p>
      Paragraph
    </p>

    <p>
      Paragraph
    </p>

    <p>
      Paragraph
    </p>

    <p>
      Paragraph
    </p>

    <p>
      Paragraph
    </p>

  </div>
```

```
  <script
src="https://ajax.googleapis.com/ajax/libs/jquery/1.11.2/j
query.min.js">
  </script>
  <script src="js/bootstrap.min.js">
  </script>
  </body>
</html>
```

```
<!DOCTYPE html>
<html lang="en">
  <head>
    <meta charset="utf-8">
    <meta http-equiv="X-UA-Compatible" content="IE=edge">
    <meta name="viewport" content="width=device-width,
initial-scale=1">
    <title>
      Pagination
    </title>
    <link href="css/bootstrap.min.css" rel="stylesheet">
    <style>

    </style>
  </head>
  <body>
    <div class="container-fluid">
      <nav>
        <ul class="pagination pagination-lg">
          <li class="disabled">
            <a href="#" aria-label="Previous">
              <span aria-hidden="true">
                &laquo;
              </span>
            </a>
          </li>
```

```
          <li class="active">
            <a href="#">
              1
            </a>
          </li>
          <li>
            <a href="#">
              2
            </a>
          </li>
          <li>
            <a href="#">
              3
            </a>
          </li>
          <li>
            <a href="#">
              4
            </a>
          </li>
          <li>
            <a href="#">
              5
            </a>
          </li>
          <li class="disabled">
            <a href="#">
              6
            </a>
          </li>
          <li>
            <a href="#">
              7
            </a>
          </li>
          <li>
            <a href="#">
              8
            </a>
          </li>
          <li>
            <a href="#">
```

```
            9
          </a>
        </li>
        <li>
          <a href="#">
            10
          </a>
        </li>
        <li>
          <a href="#" aria-label="Next">
            <span aria-hidden="true">
              &raquo;
            </span>
          </a>
        </li>

      </ul>

    </nav>

    <nav>
      <ul class="pager">
        <li class="previous disabled">
          <a href="#">
            Previous
          </a>
        </li>
        <li class="next">
          <a href="#">
            Next
          </a>
        </li>
      </ul>
    </nav>
  </div>
  <script
src="https://ajax.googleapis.com/ajax/libs/jquery/1.11.2/j
query.min.js">
  </script>
  <script src="js/bootstrap.min.js">
  </script>
 </body>
```

```
</html>
```

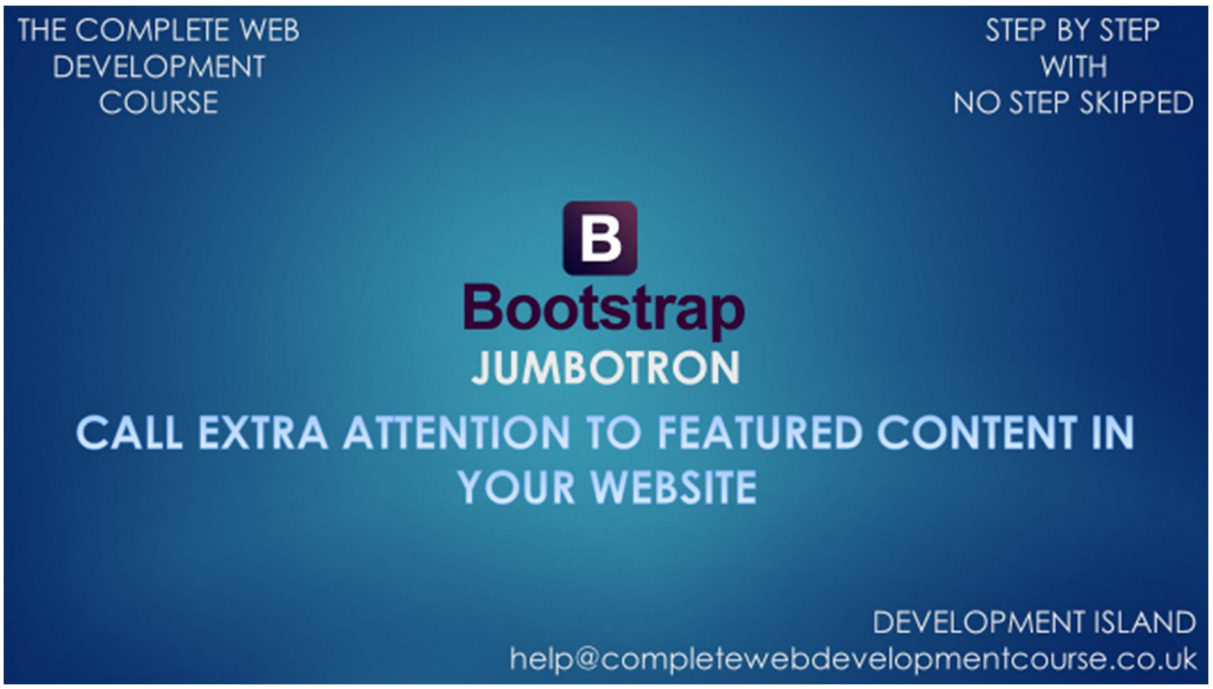


```
<!DOCTYPE html>
<html lang="en">
  <head>
    <meta charset="utf-8">
    <meta http-equiv="X-UA-Compatible" content="IE=edge">
    <meta name="viewport" content="width=device-width,
initial-scale=1">
    <title>
      Jumbotron
    </title>
    <link href="css/bootstrap.min.css" rel="stylesheet">
    <style>

    </style>
  </head>
  <body>

    <div class="jumbotron">
      <div class="container-fluid">
        <h1>
          Welcome to our best selling app.
      </h1>
      <p>
        Our app will make your life easier.
      </p>
      <p>
```

```
        <a class="btn btn-success btn-lg" href="#">
          Find out more
        </a>
      </p>
  </div>
  </div>
  <script
src="https://ajax.googleapis.com/ajax/libs/jquery/1.11.2/j
query.min.js">
  </script>
  <script src="js/bootstrap.min.js">
  </script>
  </body>
</html>
```

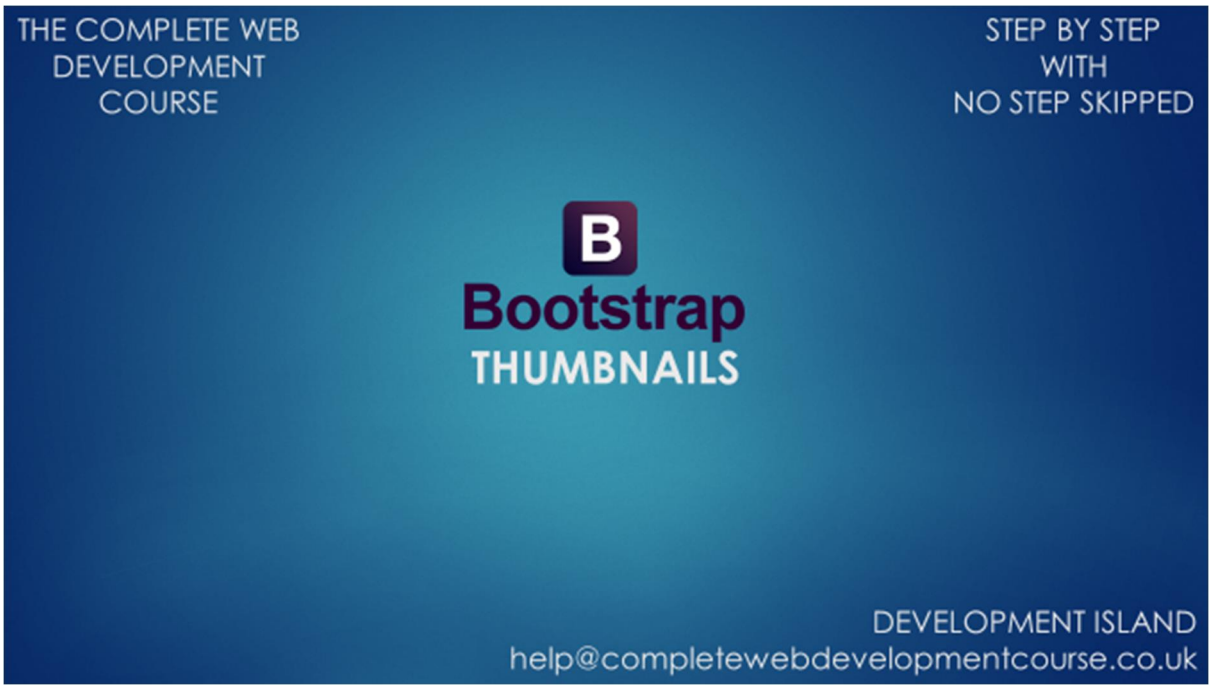


```
<!DOCTYPE html>
<html lang="en">
  <head>
    <meta charset="utf-8">
    <meta http-equiv="X-UA-Compatible" content="IE=edge">
    <meta name="viewport" content="width=device-width,
initial-scale=1">
    <title>
      Thumbnails
    </title>
    <link href="css/bootstrap.min.css" rel="stylesheet">
    <style>

    </style>
  </head>
  <body>
    <div class="container-fluid">
      <div class="row">
        <div class="col-xs-6 col-md-4">
          <a href="#" class="thumbnail">
            <img src="images/picture.jpg" alt="feather">
      </a>
  </div>
  <div class="col-xs-6 col-md-4">
    <a href="#" class="thumbnail">
      <img src="images/picture.jpg" alt="feather">
```

```
    </a>
  </div>
  <div class="col-xs-6 col-md-4">
    <a href="#" class="thumbnail">
      <img src="images/picture.jpg" alt="feather">
    </a>
  </div>
  </div>

  <div class="row">
    <div class="col-sm-6 col-md-4">
      <div class="thumbnail">
        <img src="images/picture.jpg" alt="feather">
        <div class="caption">
          <h3>
            Product title
          </h3>
          <p>
            Product description
          </p>
          <p>
            <a href="#" class="btn btn-primary"
role="button">
              Add to watch List
            </a>
            <a href="#" class="btn btn-success"
role="button">
              Add to Basket
            </a>
          </p>
        </div>
      </div>
  </div>
  <div class="col-sm-6 col-md-4">
    <div class="thumbnail">
      <img src="images/picture.jpg" alt="feather">
      <div class="caption">
        <h3>
          Product title
        </h3>
        <p>
          Product description
```

```
        </p>
        <p>
          <a href="#" class="btn btn-primary"
role="button">
            Add to watch List
          </a>
          <a href="#" class="btn btn-success"
role="button">
            Add to Basket
          </a>
        </p>
      </div>
    </div>
  </div>
  <div class="col-sm-6 col-md-4">
    <div class="thumbnail">
      <img src="images/picture.jpg" alt="feather">
      <div class="caption">
        <h3>
          Product title
        </h3>
        <p>
          Product description
        </p>
        <p>
          <a href="#" class="btn btn-primary"
role="button">
            Add to watch List
          </a>
          <a href="#" class="btn btn-success"
role="button">
            Add to Basket
          </a>
        </p>
      </div>
    </div>
  </div>
  </div>
  </div>
  </div>
  <script
src="https://ajax.googleapis.com/ajax/libs/jquery/1.11.2/j
query.min.js">
```

```
  </script>
  <script src="js/bootstrap.min.js">
  </script>
  </body>
</html>
```

```
<!DOCTYPE html>
<html lang="en">
  <head>
    <meta charset="utf-8">
    <meta http-equiv="X-UA-Compatible" content="IE=edge">
    <meta name="viewport" content="width=device-width,
initial-scale=1">
    <title>
      Dropdown plugin
    </title>
    <link href="css/bootstrap.min.css" rel="stylesheet">
    <style>

    </style>
  </head>
  <body>
    <div class="container-fluid">
      <div class="dropdown">
        <button class="dropdown-toggle btn btn-info"
type="button" id="dropdownMenu" data-toggle="dropdown">
          Dropdown plugin
          <span class="caret">
          </span>
        </button>
        <ul class="dropdown-menu" role="menu" aria-
labelledby="dropdownMenu">
```

```
          <li role="presentation" class="dropdown-header">
            Header 1
          </li>
          <li role="presentation">
            <a role="menuitem" href="#">
              item
            </a>
          </li>
          <li role="presentation">
            <a role="menuitem" href="#">
              item
            </a>
          </li>
          <li role="presentation" class="divider">
          </li>
          <li role="presentation" class="dropdown-header">
            Header 2
          </li>
          <li role="presentation">
            <a role="menuitem" href="#">
              item
            </a>
          </li>
          <li role="presentation">
            <a role="menuitem" href="#">
              item
            </a>
          </li>
          <li role="presentation" class="disabled">
            <a role="menuitem" href="#">
              item
            </a>
          </li>
        </ul>
      </div>
    </div>
    <script
src="https://ajax.googleapis.com/ajax/libs/jquery/1.11.2/j
query.min.js">
    </script>
    <script src="js/bootstrap.min.js">
    </script>
```

```
  </body>
</html>
```

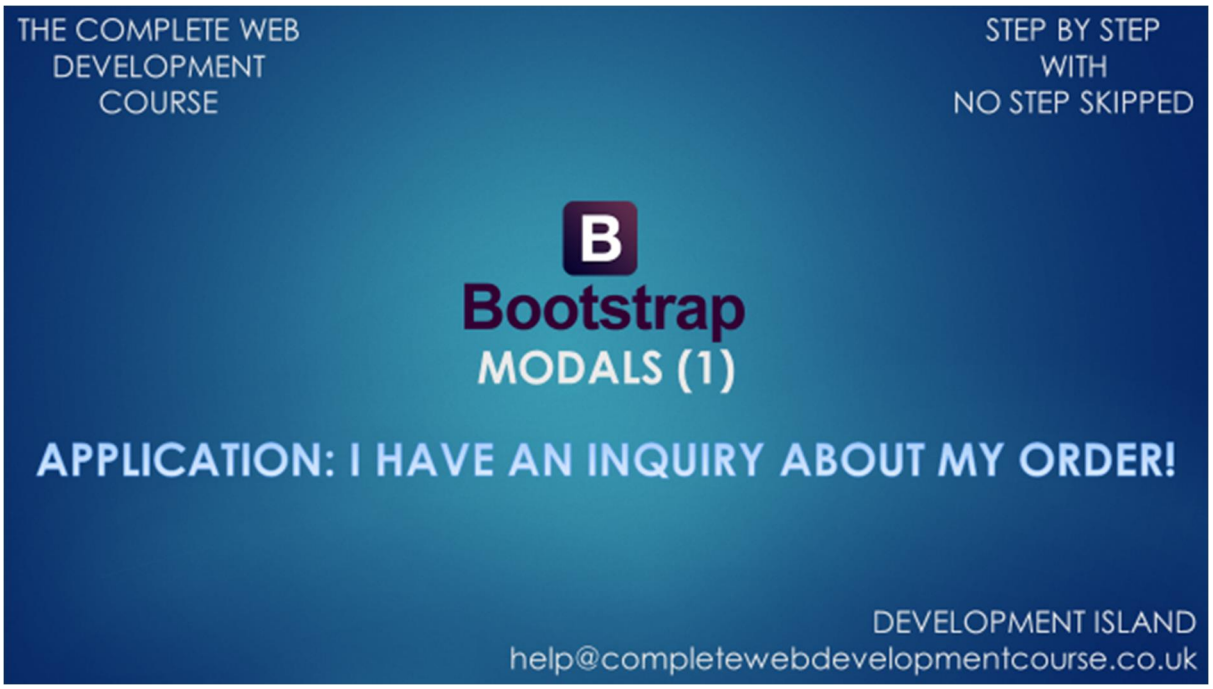

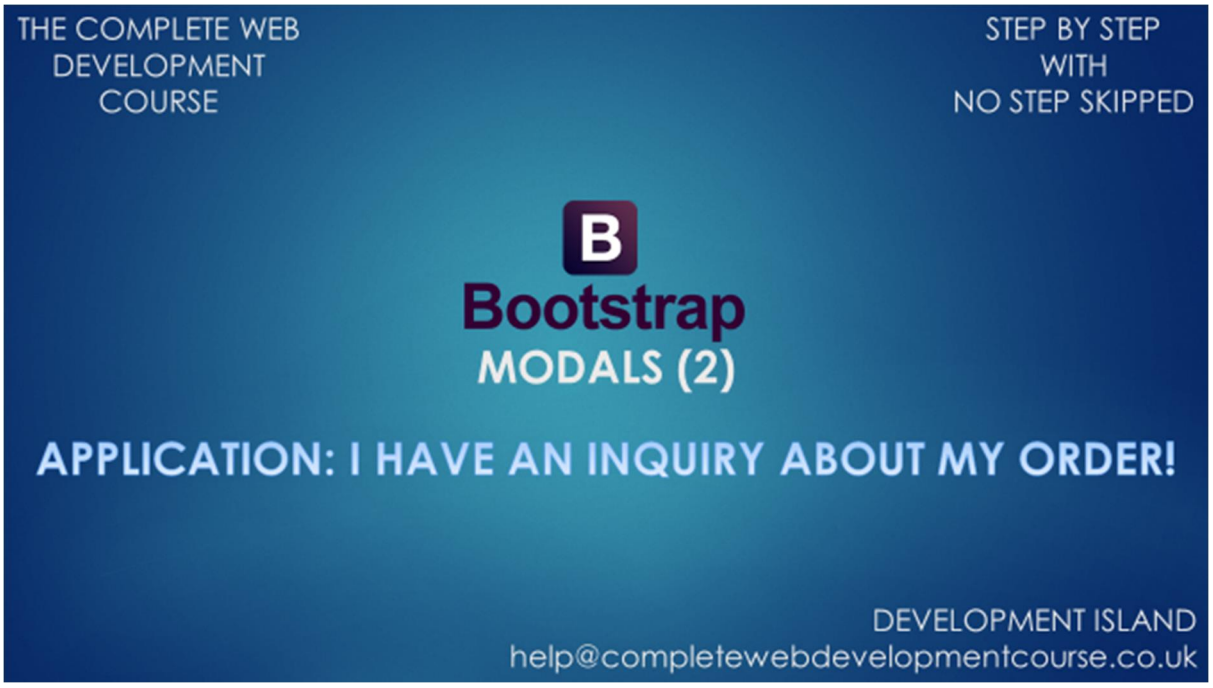


```
<!DOCTYPE html>
<html lang="en">
  <head>
    <meta charset="utf-8">
    <meta http-equiv="X-UA-Compatible" content="IE=edge">
    <meta name="viewport" content="width=device-width,
initial-scale=1">
    <title>
      Modal plugin
    </title>
```

```
    <link href="css/bootstrap.min.css" rel="stylesheet">
    <style>

    </style>
  </head>
  <body>
    <div class="container-fluid">
      <button type="button" class="btn btn-primary" data-
target="#myInquiry" data-toggle="modal" data-
ordernumber="1122">
        Order Number: 1122 - Contact us
      </button>
      <div class="modal" id="myInquiry" role="dialog"
aria-labelledby="myModalLabel" aria-hidden="true">
        <div class="modal-dialog">
          <div class="modal-content">
            <div class="modal-header">
              <button class="close" data-dismiss="modal">
                &times;
              </button>
              <h4 id="myModalLabel">
                Thank you for contacting us:
              </h4>
            </div>
            <div class="modal-body">
              <label for="inquiry">
                Your inquiry:
              </label>
              <textarea class="form-control" rows="5"
id="inquiry">
              </textarea>
            </div>
            <div class="modal-footer">
              <button type="button" class="btn btn-default"
data-dismiss="modal">
                Close
              </button>
              <button type="button" class="btn btn-primary">
                Send
              </button>
            </div>
      </div>
```

```
  </div>
  </div>
  </div>
  <script
src="https://ajax.googleapis.com/ajax/libs/jquery/1.11.2/j
query.min.js">
  </script>
  <script src="js/bootstrap.min.js">
  </script>
  <script>
    $('#myInquiry').on('hide.bs.modal',function(){
      //window.alert('Hi!');
    }
                       );
    $('#myInquiry').on('show.bs.modal',function(event){
      var button = $(event.relatedTarget);
      var orderNumber = button.data('ordernumber');
      $(this).find('#myModalLabel').text('Order number: '
+ orderNumber);
    }
                       )
  </script>
  </body>
</html>
```

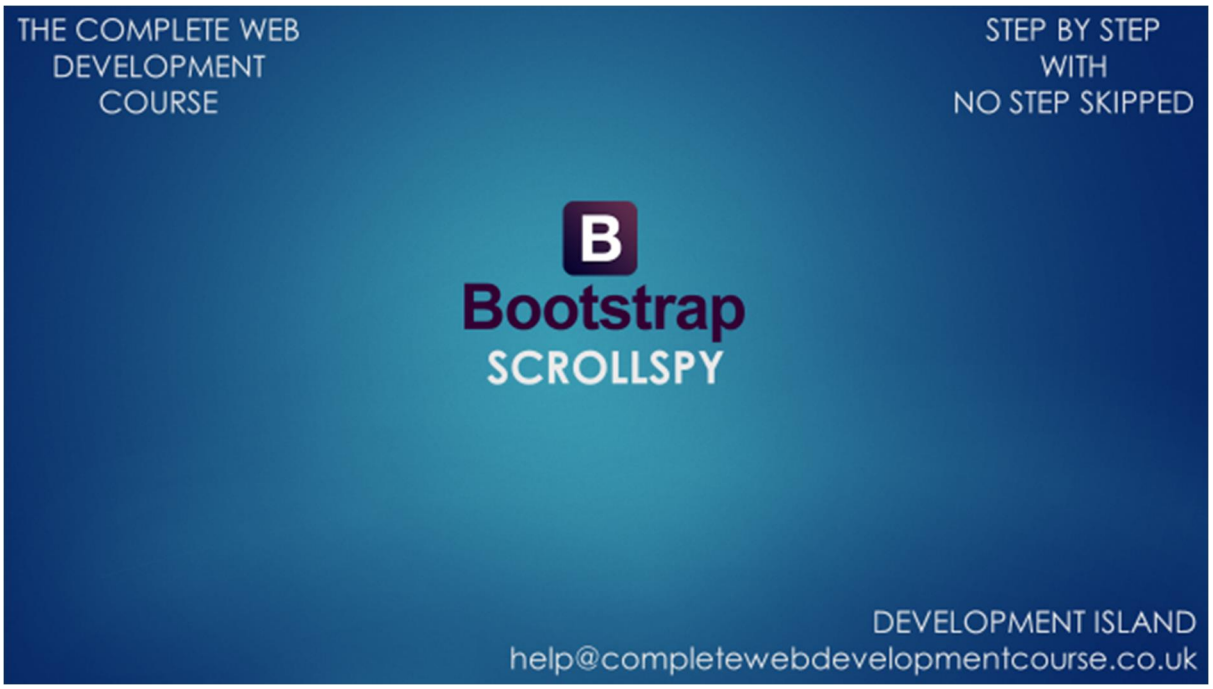


```
<!DOCTYPE html>
<html lang="en">
  <head>
    <meta charset="utf-8">
    <meta http-equiv="X-UA-Compatible" content="IE=edge">
    <meta name="viewport" content="width=device-width,
initial-scale=1">
    <title>
      Scrollspy plugin
    </title>
    <link href="css/bootstrap.min.css" rel="stylesheet">
    <style>

    </style>
  </head>
  <body>
    <nav role="navigation" class="navbar navbar-inverse
navbar-fixed-top" id="mynavBar">
      <div class="container-fluid">
        <div class="navbar-header">
          <a class="navbar-brand">
            Store
          </a>
          <button type="button" class="navbar-toggle"
data-target="#navbarCollapse" data-toggle="collapse">
            <span class="sr-only">
```

```
            Toggle navigation
          </span>
          <span class="icon-bar">
          </span>
          <span class="icon-bar">
          </span>
          <span class="icon-bar">
          </span>
        </button>
      </div>
      <div class="navbar-collapse collapse"
id="navbarCollapse">
        <ul class="nav navbar-nav">
          <li class="active">
            <a href="#allProducts">
              All Products
            </a>
          </li>
          <li>
            <a href="#help">
              Help
            </a>
          </li>
          <li>
            <a href="#department">
              Department
              <span class="caret">
              </span>
            </a>
          </li>
        </ul>
        <form class="navbar-form navbar-left"
role="search">
          <div class="input-group">
            <span class="input-group-btn">
              <button type="submit" class="btn btn-info">
                Go
              </button>
            </span>
            <label for="search" class="sr-only">
              Search
            </label>
```

```
            <input type="text" id="search" class="form-
control" placeholder="Search">
            <span class="glyphicon glyphicon-search form-
control-feedback">
            </span>
          </div>
        </form>

        <form class="navbar-form navbar-right">
          <input class="btn btn-success" type="button"
value="Login">
        </form>
      </div>
  </div>
  </nav>
  <div class="container-fluid" style="margin-top:60px;
height:300px; overflow:auto" data-spy="scroll" data-
target="#mynavBar">
    <h4 id="allProducts">
      All products
    </h4>
    <p>
      Some text
    </p>
    <p>
      Some text
    </p>
    <p>
      Some text
    </p>
    <p>
      Some text
    </p>
    <p>
      Some text
    </p>
    <p>
      Some text
    </p>
    <p>
      Some text
    </p>
```

```
    <p>
      Some text
    </p>
    <p>
      Some text
    </p>
    <p>
      Some text
    </p>
    <p>
      Some text
    </p>
    <p>
      Some text
    </p>
    <p>
      Some text
    </p>
    <p>
      Some text
    </p>
    <h4 id="help">
      Help
    </h4>
    <p>
      Some text
    </p>
    <p>
      Some text
    </p>
    <p>
      Some text
    </p>
    <p>
      Some text
    </p>
    <p>
      Some text
    </p>
    <p>
      Some text
    </p>
```

```
    <p>
      Some text
    </p>
    <p>
      Some text
    </p>
    <p>
      Some text
    </p>
    <p>
      Some text
    </p>
    <p>
      Some text
    </p>
    <p>
      Some text
    </p>
    <p>
      Some text
    </p>
    <p>
      Some text
    </p>
    <h4 id="department">
      Departments
    </h4>
    <p>
      Some text
    </p>
    <p>
      Some text
    </p>
    <p>
      Some text
    </p>
    <p>
      Some text
    </p>
    <p>
      Some text
    </p>
```

```
    <p>
      Some text
    </p>
    <p>
      Some text
    </p>
    <p>
      Some text
    </p>
    <p>
      Some text
    </p>
    <p>
      Some text
    </p>
    <p>
      Some text
    </p>
    <p>
      Some text
    </p>
    <p>
      Some text
    </p>
    <p>
      Some text
    </p>
    <p>
      Some text
    </p>
  </div>
  <script
src="https://ajax.googleapis.com/ajax/libs/jquery/1.11.2/j
query.min.js">
  </script>
  <script src="js/bootstrap.min.js">
  </script>
  <script>
    $('#mynavBar').on('activate.bs.scrollspy',function(){
      $('.btn-success').toggleClass('btn-warning');

    }
                    );

  </script>
```

```
  </body>
</html>
```

```
<!DOCTYPE html>
<html lang="en">
  <head>
    <meta charset="utf-8">
    <meta http-equiv="X-UA-Compatible" content="IE=edge">
    <meta name="viewport" content="width=device-width,
initial-scale=1">
    <title>
      Tabs plugin
    </title>
    <link href="css/bootstrap.min.css" rel="stylesheet">
    <style>

    </style>
  </head>
  <body>
    <div class="container-fluid">
      <ul class="nav nav-tabs nav-justified" id="myTabs">
        <li role="presentation" class="active">
          <a href="#home" data-toggle="tab">
            <span class="glyphicon glyphicon-home">
            </span>
            Home
          </a>
        </li>
```

```
      <li role="presentation">
        <a href="#messages" data-toggle="tab">
          <span class="glyphicon glyphicon-envelope">
          </span>
          Messages
          <span class="badge">
            3
          </span>
        </a>
      </li>

      <li role="presentation">
        <a href="#notifications" data-toggle="tab">
          Notifications
          <span class="badge">
            3
          </span>
        </a>
      </li>

      <li role="presentation">
        <a href="#contactUs" data-toggle="tab">
          Contact us
        </a>
      </li>

    </ul>

    <div id="myTabContent" class="tab-content">
      <div class="tab-pane active fade in" id="home">
        <p>
          Home Content.
        </p>
        <p>
          Some text.
        </p>
        <p>
          Some text.
        </p>
        <p>
          Some text.
        </p>
```

```
          <p>
            Some text.
          </p>
          <p>
            Some text.
          </p>
          <p>
            Some text.
          </p>
          <p>
            Some text.
          </p>
        </div>
        <div class="tab-pane fade" id="messages">
          <p>
            Messages Content.
          </p>
          <p>
            Some text.
          </p>
          <p>
            Some text.
          </p>
          <p>
            Some text.
          </p>
          <p>
            Some text.
          </p>
          <p>
            Some text.
          </p>
          <p>
            Some text.
          </p>
          <p>
            Some text.
          </p>
          <p>
            Some text.
          </p>
        </div>
        <div class="tab-pane fade" id="notifications">
          <p>
            Notifications Content.
```

```
      </p>
      <p>
        Some text.
      </p>
      <p>
        Some text.
      </p>
      <p>
        Some text.
      </p>
      <p>
        Some text.
      </p>
      <p>
        Some text.
      </p>
      <p>
        Some text.
      </p>
      <p>
        Some text.
      </p>
      <p>
        Some text.
      </p>
    </div>
    <div class="tab-pane fade" id="contactUs">
      <p>
        Contact us.
      </p>
      <p>
        Some text.
      </p>
      <p>
        Some text.
      </p>
      <p>
        Some text.
      </p>
      <p>
        Some text.
      </p>
      <p>
        Some text.
      </p>
      <p>
        Some text.
      </p>
```

```
          <p>
            Some text.
          </p>
          <p>
            Some text.
          </p>
        </div>
      </div>
    </div>
    <script
src="https://ajax.googleapis.com/ajax/libs/jquery/1.11.2/j
query.min.js">
    </script>
    <script src="js/bootstrap.min.js">
    </script>
    <script>
      $('#myTabs a:last').tab('show');
      $('a[data-
toggle="tab"]').on('shown.bs.tab',function(event){
        window.alert('The active tab is: ' +
$(event.target).text() + '. The previous tab is: ' +
$(event.relatedTarget).text());
      }
                                      );
    </script>
  </body>
</html>
```

```
<!DOCTYPE html>
<html lang="en">
  <head>
    <meta charset="utf-8">
    <meta http-equiv="X-UA-Compatible" content="IE=edge">
    <meta name="viewport" content="width=device-width,
initial-scale=1">
    <title>
      Tooltip plugin
    </title>
    <link href="css/bootstrap.min.css" rel="stylesheet">
    <style>

    </style>
  </head>
  <body>
    <div class="container-fluid">
      <div>
        <p>
          Paragraph.
        </p>
        <p>
          This is a
          <a href="http://www.google.com" title="Google"
data-toggle="tooltip" data-placement="right">
            link
```

```
          </a>
          .
        </p>
        <button type="button" class="btn btn-primary"
data-toggle="tooltip" title="button tooltip" data-
placement="bottom">
          Button
        </button>
      </div>
    </div>
    <script
src="https://ajax.googleapis.com/ajax/libs/jquery/1.11.2/j
query.min.js">
    </script>
    <script src="js/bootstrap.min.js">
    </script>
    <script>
      $('[data-toggle="tooltip"]').tooltip();
      $('[data-toggle="tooltip"]').tooltip('show');
      $('[data-
toggle="tooltip"]').on('hidden.bs.tooltip',function(){
        window.alert("tooltip hidden!");
      }
                                        )

    </script>
  </body>
</html>
```

THE COMPLETE WEB DEVELOPMENT COURSE
STEP BY STEP WITH NO STEP SKIPPED
Bootstrap
POPOVERS
APPLICATION: CREATE A POPOVER JUST LIKE THE ONE YOU SEE ON AN IPAD
DEVELOPMENT ISLAND
help@completewebdevelopmentcourse.co.uk

```
<!DOCTYPE html>
<html lang="en">
  <head>
    <meta charset="utf-8">
    <meta http-equiv="X-UA-Compatible" content="IE=edge">
    <meta name="viewport" content="width=device-width,
initial-scale=1">
    <title>
      Popover plugin
    </title>
    <link href="css/bootstrap.min.css" rel="stylesheet">
    <style>

    </style>
  </head>
  <body>
    <div class="container-fluid">
      <button type="button" class="btn btn-primary" data-
toggle="popover" data-content="
<h4>
Popover
</h4>
<p>
This is a popover just like the one you see on an ipad
</p>
" data-trigger="hover">
```

```
  Button
  </button>
  </div>
  <script
src="https://ajax.googleapis.com/ajax/libs/jquery/1.11.2/j
query.min.js">
  </script>
  <script src="js/bootstrap.min.js">
  </script>
  <script>
    $(function(){
      $('[data-toggle="popover"]').popover({
        html : true,
        delay : {"show":1000, "hide": 300}
      }
                                          );
      $('[data-
toggle="popover"]').on('hidden.bs.popover',function(){
        window.alert('Popover hidden!');
      }
                                        );
    }
     );
  </script>
  </body>
</html>
```

THE COMPLETE WEB DEVELOPMENT COURSE
STEP BY STEP WITH NO STEP SKIPPED
Bootstrap
ALERTS
APPLICATION: CREATE AN ALERT BOX TO SHOW A WARNING OR SUCCESS MESSAGE
DEVELOPMENT ISLAND
help@completewebdevelopmentcourse.co.uk

```
<!DOCTYPE html>
<html lang="en">
  <head>
    <meta charset="utf-8">
    <meta http-equiv="X-UA-Compatible" content="IE=edge">
    <meta name="viewport" content="width=device-width,
initial-scale=1">
    <title>
      Alert plugin
    </title>
    <link href="css/bootstrap.min.css" rel="stylesheet">
    <style>

    </style>
  </head>
  <body>
    <div class="container-fluid">
      <div id="alert1" class="alert alert-warning">
        <a class="close" data-dismiss="alert">
          &times;
        </a>
        <strong>
          Warning!
        </strong>
        Your unsaved data was lost.
      </div>
```

```
      <div id="alert2" class="alert alert-success">
        <a class="close" data-dismiss="alert">
          &times;
        </a>
        <strong>
          Success!
        </strong>
        File uploaded successfully.
      </div>
    </div>
    <script
src="https://ajax.googleapis.com/ajax/libs/jquery/1.11.2/j
query.min.js">
    </script>
    <script src="js/bootstrap.min.js">
    </script>
    <script>
      $(function(){
        $('.alert').on('closed.bs.alert',function(){
          window.alert('Alert message closed!');
        }
                      );

        $('#alert1').alert('close');
      }
       );
    </script>
  </body>
</html>
```

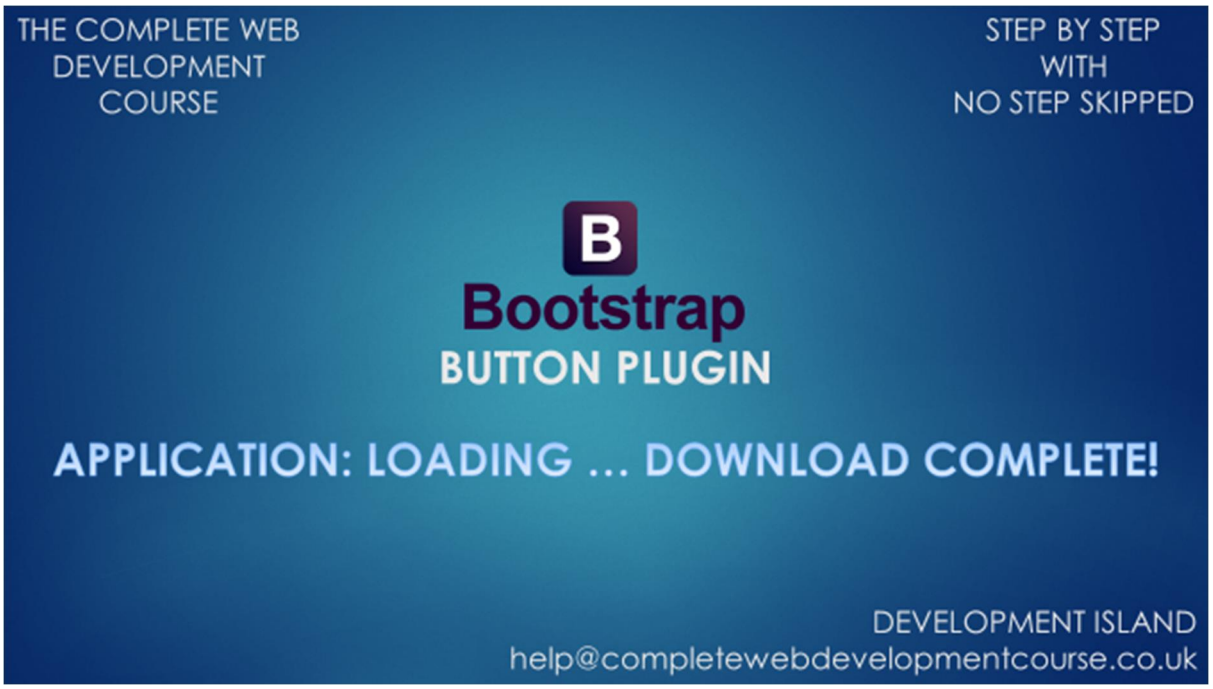


```
<!DOCTYPE html>
<html lang="en">
  <head>
    <meta charset="utf-8">
    <meta http-equiv="X-UA-Compatible" content="IE=edge">
    <meta name="viewport" content="width=device-width,
initial-scale=1">
    <title>
      Button plugin
    </title>
    <link href="css/bootstrap.min.css" rel="stylesheet">
    <style>

    </style>
  </head>
  <body>
    <div class="container-fluid">
      <button type="button" class="btn btn-primary"
id="button1" data-loading-text="Loading...">
        Button1
      </button>


      <button type="button" class="btn btn-primary"
id="button2" data-loading-text="Loading..." data-complete-
text="Download complete!">
```

```
        Button2
      </button>

    </div>
    <script
src="https://ajax.googleapis.com/ajax/libs/jquery/1.11.2/j
query.min.js">
    </script>
    <script src="js/bootstrap.min.js">
    </script>
    <script>
      $(function(){
        $('#button1').click(function(){

$(this).button('loading').delay(1000).queue(function(){
            $(this).button('reset');
        }
                                                    );
    }
                        );

  $('#button2').click(function(){

$(this).button('loading').delay(1000).queue(function(){
      $(this).button('complete');
    }
                                                  );
  }
                      );
}
 );
  </script>
  </body>
</html>
```

```
<!DOCTYPE html>
<html lang="en">
  <head>
    <meta charset="utf-8">
    <meta http-equiv="X-UA-Compatible" content="IE=edge">
    <meta name="viewport" content="width=device-width,
initial-scale=1">
    <title>
      Collapse plugin
    </title>
    <link href="css/bootstrap.min.css" rel="stylesheet">
    <style>

    </style>
  </head>
  <body>
    <div class="container-fluid">
      <a class="btn btn-primary" href="#collapse01" data-
toggle="collapse">
        Link
      </a>
      <button class="btn btn-primary" data-
target="#collapse02" data-toggle="collapse">
        Button
      </button>
      <div class="bg-danger collapse" id="collapse01">
```

```
        <p>
          Collapsible content 1.
        </p>
        <p>
          Collapsible content 1.
        </p>
        <p>
          Collapsible content 1.
        </p>
      </div>
      <div class="bg-warning collapse" id="collapse02">
        <p>
          Collapsible content 2.
        </p>
        <p>
          Collapsible content 2.
        </p>
        <p>
          Collapsible content 2.
        </p>
      </div>
      <br />

      <br />

      <div id="accordion" class="panel-group">
        <div class="panel panel-warning">
          <div class="panel-heading">
            <h4 class="panel-title">
              <a href="#collapse1" data-toggle="collapse"
data-parent="#accordion">
                Section 1
              </a>
            </h4>
      </div>
      <div class="panel-collapse collapse in"
id="collapse1">
        <div class="panel-body">
          <p>
            Collapsible content 1.
          </p>
          <p>
```

```
            Collapsible content 1.
          </p>
          <p>
            Collapsible content 1.
          </p>
        </div>
      </div>
  </div>
  <div class="panel panel-success">
    <div class="panel-heading">
      <h4 class="panel-title">
        <a href="#collapse2" data-toggle="collapse" data-
parent="#accordion">
          Section 2
        </a>
      </h4>
    </div>
    <div class="panel-collapse collapse" id="collapse2">
      <div class="panel-body">
        <p>
          Collapsible content 2.
        </p>
        <p>
          Collapsible content 2.
        </p>
        <p>
          Collapsible content 2.
        </p>
      </div>
    </div>
  </div>
  <div class="panel panel-danger">
    <div class="panel-heading">
      <h4 class="panel-title">
        <a href="#collapse3" data-toggle="collapse" data-
parent="#accordion">
          Section 3
        </a>
      </h4>
    </div>
    <div class="panel-collapse collapse in"
id="collapse3">
```

```
      <div class="panel-body">
        <p>
          Collapsible content 3.
        </p>
        <p>
          Collapsible content 3.
        </p>
        <p>
          Collapsible content 3.
        </p>
      </div>
    </div>
  </div>
  </div>
  </div>
  <script
src="https://ajax.googleapis.com/ajax/libs/jquery/1.11.2/j
query.min.js">
  </script>
  <script src="js/bootstrap.min.js">
  </script>
  <script>
    $(function(){
      $('#collapse2').collapse('show');
      $('#collapse3').collapse('toggle');
      $('#collapse1').on('hidden.bs.collapse',function(){
        window.alert('Section 1 hidden!');
      }
                          );
    }
     );

  </script>
  </body>
</html>
```

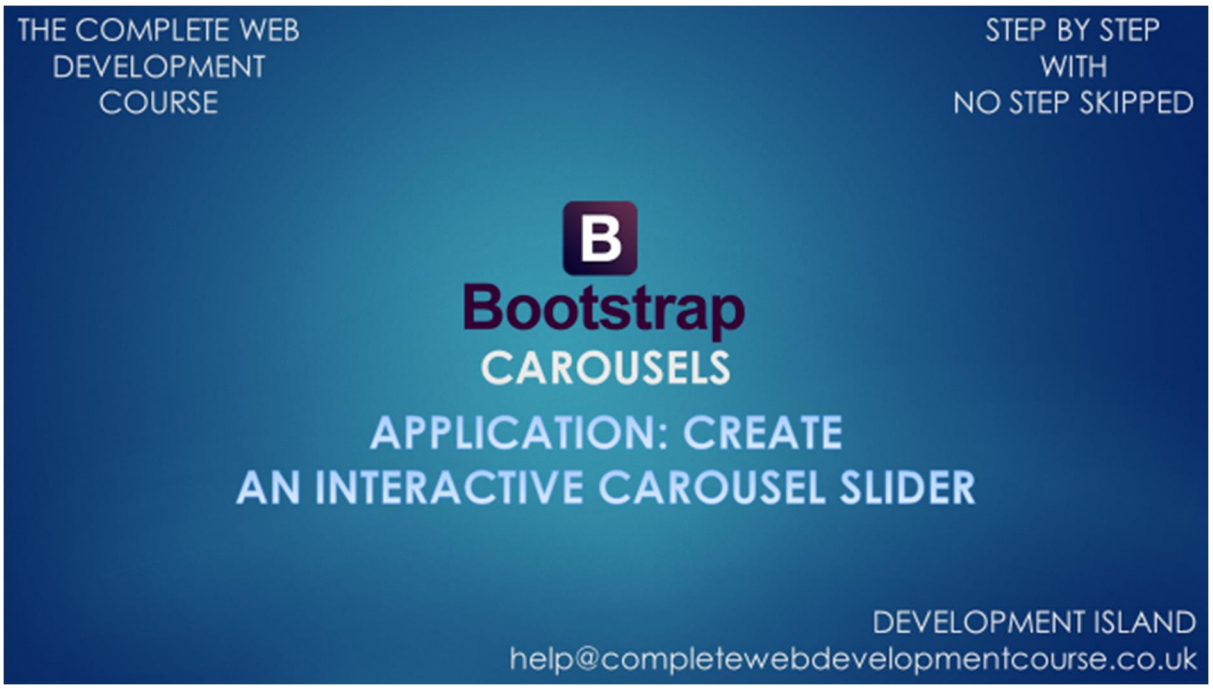


```
<!DOCTYPE html>
<html lang="en">
  <head>
    <meta charset="utf-8">
    <meta http-equiv="X-UA-Compatible" content="IE=edge">
    <meta name="viewport" content="width=device-width,
initial-scale=1">
    <title>
      Carousel plugin
    </title>
    <link href="css/bootstrap.min.css" rel="stylesheet">
    <style>
      .yellow{
        color: yellow;
      }
    </style>
  </head>
  <body>
    <div class="container-fluid">
      <div class="carousel slide" id="myCarousel" data-
ride="carousel">
        <ol class="carousel-indicators">
          <li data-target="#myCarousel" data-slide-to="0"
class="active">
          </li>
          <li data-target="#myCarousel" data-slide-to="1">
```

```
          </li>
          <li data-target="#myCarousel" data-slide-to="2">
          </li>
        </ol>
        <div class="carousel-inner">
          <div class="item active">
            <img src="images/picture.jpg">
          <div class="carousel-caption">
            <p>
              First Slide
            </p>
          </div>
      </div>
      <div class="item">
        <img src="images/picture.jpg">
        <div class="carousel-caption">
          <p>
            Second Slide
          </p>
        </div>
      </div>
      <div class="item">
        <img src="images/picture.jpg">
        <div class="carousel-caption">
          <p>
            Third Slide
          </p>
        </div>
      </div>
  </div>
  <a class="left carousel-control" href="#myCarousel"
data-slide="prev">
    <span class="glyphicon glyphicon-chevron-left">
    </span>
    <span class="sr-only">
      Previous
    </span>
  </a>
  <a class="right carousel-control" href="#myCarousel"
data-slide="next">
    <span class="glyphicon glyphicon-chevron-right">
    </span>
```

```
    <span class="sr-only">
      Previous
    </span>
  </a>
  </div>
  </div>
  <script
src="https://ajax.googleapis.com/ajax/libs/jquery/1.11.2/j
query.min.js">
  </script>
  <script src="js/bootstrap.min.js">
  </script>
  <script>
    $(function(){
      $('.carousel').carousel({
        interval : 1000
      }
                              );
      $('.carousel').on('slide.bs.carousel',function(){
        $('p').toggleClass('yellow');
      }
                         );
      $('.carousel').hover(function(){
        $(this).carousel('pause');
      }
                           ,function(){
                             $(this).carousel('cycle');
                           }
                          );
    }
     );
  </script>
  </body>
</html>
```

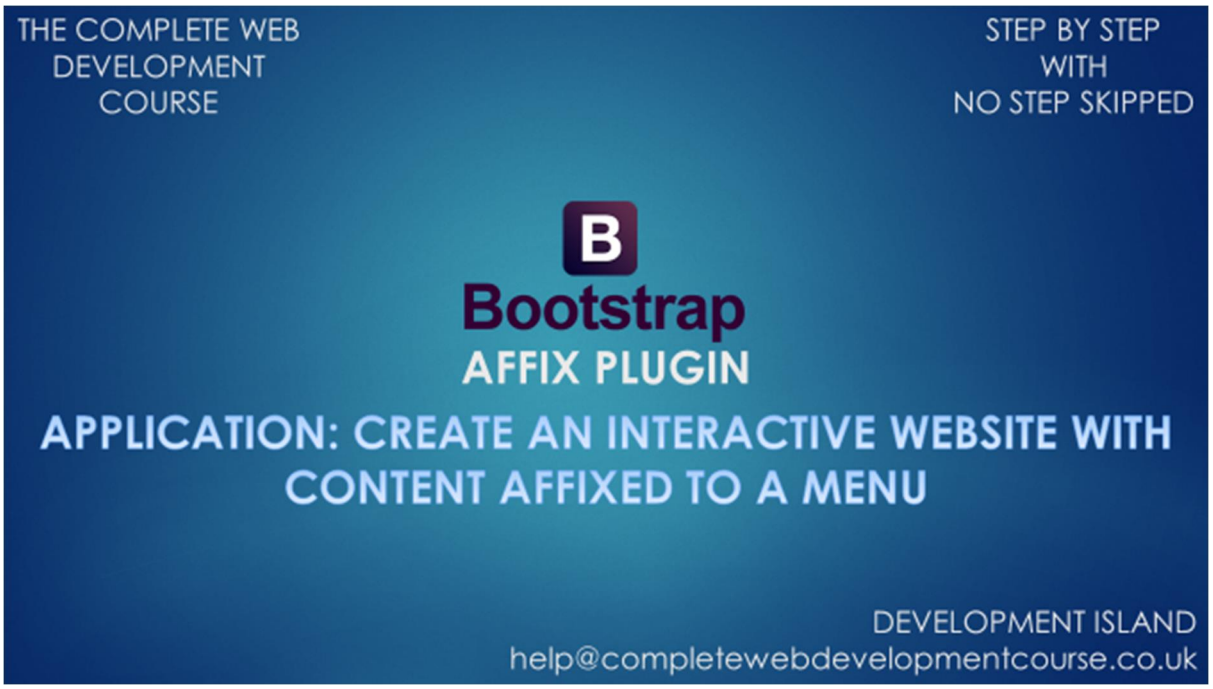
THE COMPLETE WEB DEVELOPMENT COURSE
STEP BY STEP WITH NO STEP SKIPPED
Bootstrap
AFFIX PLUGIN
APPLICATION: CREATE AN INTERACTIVE WEBSITE WITH CONTENT AFFIXED TO A MENU
DEVELOPMENT ISLAND
help@completewebdevelopmentcourse.co.uk

```
<!DOCTYPE html>
<html lang="en">
  <head>
    <meta charset="utf-8">
    <meta http-equiv="X-UA-Compatible" content="IE=edge">
    <meta name="viewport" content="width=device-width,
initial-scale=1">
    <title>
      Affix plugin
    </title>
    <link href="css/bootstrap.min.css" rel="stylesheet">
    <style>
      ul.nav-tabs{
        width: auto;
        border: 1px solid #9e60f0;
        border-radius: 3px;
      }
      ul.nav-tabs li.active a, ul.nav-tabs li.active
a:hover{
        color: white;
        background: #7628dc;
      }
    </style>

  </head>
  <body data-spy="scroll" data-target="#myScrollspy">
```

```
    <div class="container-fluid">
      <p>
        Paragraph
      </p>
      <p>
        Paragraph
      </p>
      <p>
        Paragraph
      </p>
      <p>
        Paragraph
      </p>
      <p>
        Paragraph
      </p>
      <p>
        Paragraph
      </p>
      <p>
        Paragraph
      </p>
      <p>
        Paragraph
      </p>
      <p>
        Paragraph
      </p>
      <div class="row">
        <div class="col-xs-3" id="myScrollspy">
          <ul id="myAffix" class="nav nav-tabs nav-
stacked">
            <li>
              <a href="#section1">
                Section One
              </a>
          </li>
          <li>
            <a href="#section2">
              Section Two
            </a>
          </li>
```

```
          <li>
            <a href="#section3">
              Section Three
            </a>
          </li>
          <li>
            <a href="#section4">
              Section Four
            </a>
          </li>
          <li>
            <a href="#section5">
              Section Five
            </a>
          </li>
      </ul>

  </div>
  <div class="col-xs-9">
    <h2 id="section1">
      Section One
    </h2>
    <p>
      C1
    </p>
    <p>
      C1
    </p>
    <p>
      C1
    </p>
    <p>
      C1
    </p>
    <p>
      C1
    </p>
    <p>
      C1
    </p>
    <p>
      C1
    </p>
    <p>
      C1
```

```
    </p>
    <p>
      C1
    </p>
    <p>
      C1
    </p>
    <p>
      C1
    </p>
    <p>
      C1
    </p>
    <p>
      C1
    </p>
    <p>
      C1
    </p>
    <p>
      C1
    </p>
    <p>
      C1
    </p>
    <h2 id="section2">
      Section Two
    </h2>
    <p>
      C2
    </p>
    <p>
      C2
    </p>
    <p>
      C2
    </p>
    <p>
      C2
    </p>
    <p>
      C2
    </p>
    <p>
      C2
```

```
    </p>
    <p>
      C2
    </p>
    <p>
      C2
    </p>
    <p>
      C2
    </p>
    <p>
      C2
    </p>
    <p>
      C2
    </p>
    <p>
      C2
    </p>
    <p>
      C2
    </p>
    <p>
      C2
    </p>
    <h2 id="section3">
      Section Three
    </h2>
    <p>
      C3
    </p>
    <p>
      C3
    </p>
    <p>
      C3
    </p>
    <p>
      C3
    </p>
    <p>
      C3
```

```
    </p>
    <p>
      C3
    </p>
    <p>
      C3
    </p>
    <p>
      C3
    </p>
    <p>
      C3
    </p>
    <p>
      C3
    </p>
    <p>
      C3
    </p>
    <p>
      C3
    </p>
    <p>
      C3
    </p>
    <p>
      C3
    </p>
    <p>
      C3
    </p>
    <h2 id="section4">
      Section Four
    </h2>
    <p>
      C4
    </p>
    <p>
      C4
    </p>
    <p>
      C4
    </p>
    <p>
      C4
```

```
    </p>
    <p>
      C4
    </p>
    <p>
      C4
    </p>
    <p>
      C4
    </p>
    <p>
      C4
    </p>
    <p>
      C4
    </p>
    <p>
      C4
    </p>
    <p>
      C4
    </p>
    <p>
      C4
    </p>
    <p>
      C4
    </p>
    <p>
      C4
    </p>
    <p>
      C4
    </p>
    <h2 id="section5">
      Section Five
    </h2>
    <p>
      C5
    </p>
    <p>
      C5
    </p>
    <p>
      C5
```

```
    </p>
    <p>
      C5
    </p>
    <p>
      C5
    </p>
    <p>
      C5
    </p>
    <p>
      C5
    </p>
    <p>
      C5
    </p>
    <p>
      C5
    </p>
    <p>
      C5
    </p>
    <p>
      C5
    </p>
    <p>
      C5
    </p>
    <p>
      C5
    </p>
    <p>
      C5
    </p>
    <p>
      C5
    </p>
    <p>
      C5
    </p>
    <p>
      C5
    </p>
  </div>
  </div>
  </div>
  <script
src="https://ajax.googleapis.com/ajax/libs/jquery/1.11.2/j
query.min.js">
  </script>
  <script src="js/bootstrap.min.js">
```

```
  </script>
  <script>
    $(function(){
      $('#myAffix').affix({
        offset: {
          top: 300}
    }
                          );
}
 );
  </script>
  </body>
</html>
```